


SEA STALLION POWER CABLE PLOUGH

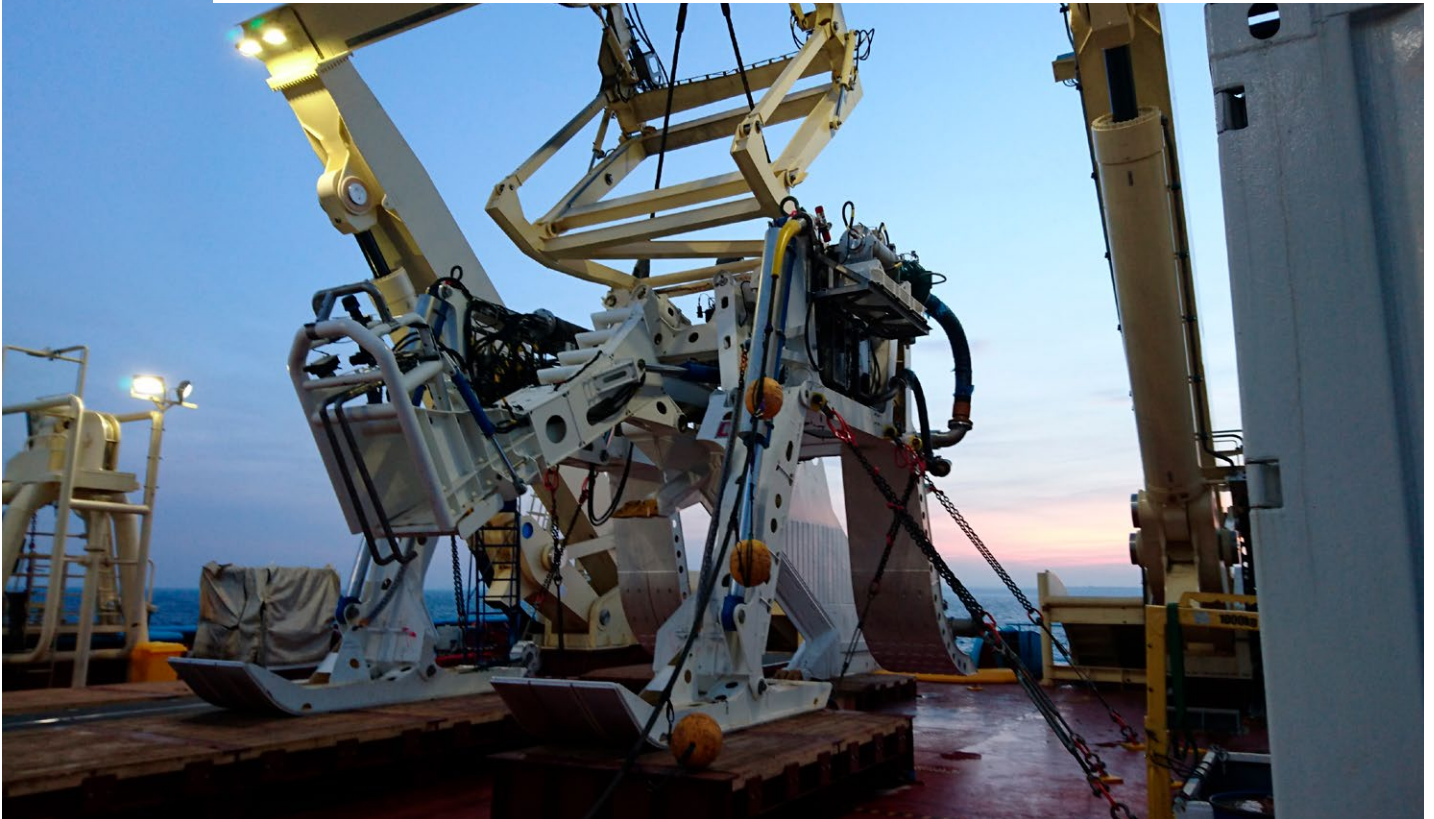

All rights reserved. Reproduction in any form or by any means is not allowed, without prior permission in writing from IHC Merwede Holding BV.

PRODUCT OVERVIEW

The *Sea Stallion* cable plough range has an extensive track record spanning almost 20 years in the burial of subsea cables. The latest generation boasts significant improvements over early versions whilst still incorporating the robust highly effective multi-bladed share system.

Considerable effort has resulted in reduced vessel fuel costs and improved the cable handling combined with the latest Ethernet control system.

CUSTOMER SPECIFIC

Working directly with clients to deliver tailored subsea solutions the plough is customisable to meet project-specific requirements. The plough can be upgraded throughout its life cycle to confront new challenges using the latest technologies.

The plug & play design of the control equipment ensures customer components can be easily integrated using the self-diagnostic, multi-drop down, distributed control system. All IHC EB control systems are fully compliant with IEC 61508.

CUSTOMER BENEFITS

Reduced costs:

- lower vessel fuel consumption
- increased operational window
- turnkey supply of equipment and vessel
- responsive 24/7 worldwide service
- attractive financing available.

KEY TECHNICAL FEATURES

Better cable protection:

- pivoting bellmouth®
 - ultra-cable friendly cable path with reduced bend angles especially lowering the plough through the water column
 - lower residual cable tension
- lowering tow points
 - reduced skid forces vessel fuel costs
 - increased stability for better penetration
- full monitoring of cable tension and position.

SAFE AND ENVIRONMENTALLY FRIENDLY

- buoyant umbilical, no requirement for floats
- biodegradable oil as standard.



**THE TECHNOLOGY
INNOVATOR.**

ROYALIHC.COM

SPECIFICATION

Trench depth	0.0m to 3.3m
Soil strength	5kPa to 350kPa
Cable OD	Ø30mm to Ø300mm
Cable MBR	5.0m
Tow force	150Te (continuous)
Steering	±10°
Water depth	1500m
Weight in air	50Te (with jetting fitted)
Dimensions (on deck)	Length 14.1m Width 6.0m Height 6.6m (drawbar up)

OPERATION

Share	Aggressive, multi blade
Plough handling	lifting drawbar
Cable handling	simultaneous lay & trench
Umbilical	buoyant
Launch & Recovery	sea State 5 ($H_{sig} = 3.0m$)

CONTROL

SCADA	Ethernet
Instrumentation	comprehensive with full data logging and remote diagnostics


SURVEILLANCE (TYPICAL)

Cameras	3 off low light, colour etc
Lamps	6 off dimmable LED's
Heading	Gyro or compass
Sonar	obstacle avoidance

OPTIONS

Jetting, dilation®	150kW in share tips Beach operation
Post lay burial	subsea cable load/unload <ul style="list-style-type: none">• crane,• bellmouth tines• tipping trough• pivoting depressor
Umbilical	ultra-low loss 6kV

All details are typical. Please contact uk@royalihc.com for any client specific requirements.

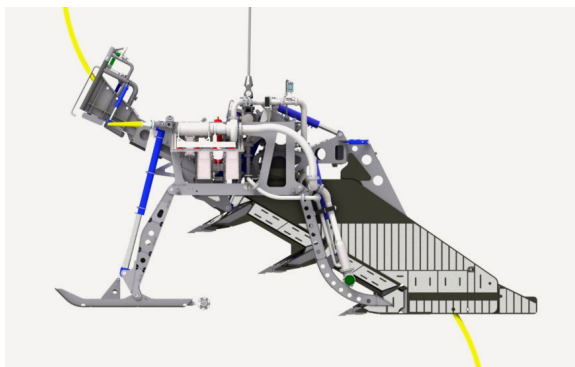

**THE TECHNOLOGY
INNOVATOR.**

ROYALIHC.COM